

## **OPERATION AND CHANGING INSTRUCTIONS (Continued...)**

### **Operating and changing instructions for Delta Make 3 wheel Mechanical Combination Lock.**

Next dial the existing combination 10-20-30, as described previously, on the CHANGING INDEX, but STOP the dial on the 30 which is the last number of the combination.

In the back of the door, insert the Change Key into the key hole. If the Change Key will not go in, the wheels are not lined-up to be changed, and you must dial the combination again on the Changing Index.

Turn the Change Key to the RIGHT until it stops (approximately one-quarter turn). Leave the key in the lock. Select a new combination, such as 40-50-60. Never select a number from 0 to 20 (the forbidden zone) as the last number of the combination.

Using the CHANGING INDEX this time, turn the dial to the LEFT and pass 40 three times and stop exactly on 40 the fourth time on changing index.

Turn the dial to the RIGHT and pass 50 two times and stop exactly on 50 the third time on changing index.

Turn the dial LEFT and pass 60 once and stop exactly on 60 the second time on changing index. Leave the dial on 60.

Now turn the Change Key to LEFT until it stops and REMOVE the key.

Completely dial the new combination, 40-50-60, on the OPENING Index, several times to make sure the combination lock will open before you shut and lock the door off the safe.

After changing, always dial the new combination and retract the combination lock bolt several times before shutting and locking the vault or safe door.

#### **NOTE :**

- ★ The lock bolt must move freely in the lock body.
- ★ Pressure against the lock bolt should be avoided.
- ★ While setting or operating of lock, the direction of rotation of Dial should be uniform


# DELTA LOCK

Operating and Changing instructions for Delta Make  
3 wheel Mechanical Combination Lock.

Model : LK 1200 for 3 Wh. Comb Lock.

Model : DR 2300L For Front Reading Dial with Dial Lock

Model : DR 2300 For Front Reading Dial without Dial Lock

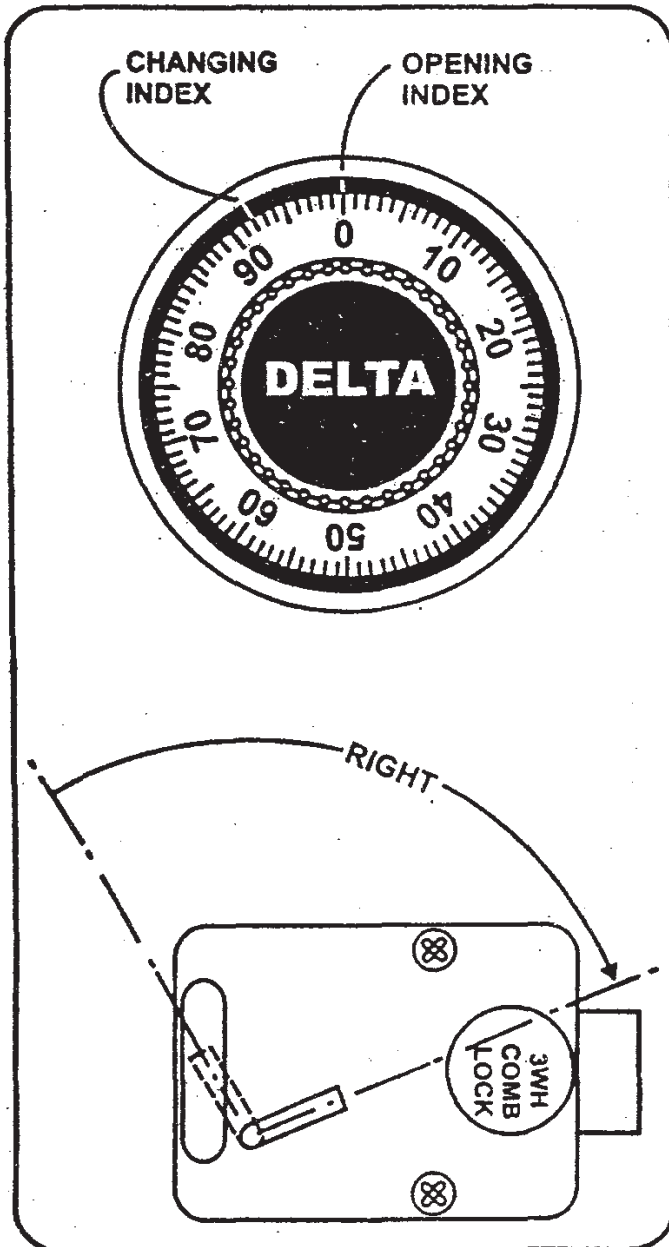

## OPENING THE LOCK USING THE OPENING INDEX

If the safe comes with a factory-set combination on 50, turn the dial to the LEFT and pass the number 50 four times and then stop with 50 lined-up on the OPENING Index. Turn RIGHT until the dial stops. The combination lock bolt will retract and the safe may be opened.

To open Lock with a previously-set combination, for example, 10-20-30;

Turn the dial to the LEFT at least four complete times to clear the combination lock to accept the combination.

Using the OPENING Index, turn the dial LEFT and pass the first number of the combination, 10, three times and stop exactly on 10 the fourth time.

Turn the dial to the RIGHT and pass 20 two times and stop exactly on 20 the third time

Turn the dial LEFT and pass 30 once and stop exactly on 30 the second time.

Turn the dial to the RIGHT. When the lock is open, the dial will not turn to the right any more.

To lock the combination lock, turn the dial four complete turns to the LEFT.

## CHANGING THE COMBINATION ON THE CHANGING INDEX

To change the combination, you will need access to the existing combination and a change key.

To change the combination, you must first open the safe door by dialing the combination, 10-20-30. With bolt fully retracted (lock open), before changing combinations, verify that the dial stops at '0' on the OPENING Index.